

# TCS ON POINT DIFFERENTIAL PRESSURE



**Ensure safe aircraft fueling with filter differential pressure monitoring and limit shutdown.**

## **AUTOMATIC DIFFERENTIAL PRESSURE MONITORING SYSTEM**

- » Monitor Pressure Before & After Filtration
- » Correct Filter  $\Delta P$  Based on Maximum Achievable Flow Rate
- » Automatic Shutdown if  $\Delta P$  Exceeds Limits

## **SENSOR INTEGRATION**


- » GTP 7534 Digital Gammon Gauge
- » Analog Differential Pressure Sensors
- » See c $\Delta P$  Trending & Analytics Online via TCS HUB Host Manager to Closely Monitor Filter Changes Over Time



## **TECHNOLOGY**

- » Voltage or 4-20 mA Current Input
- » Pressure Range (Scalable)
- » Limit Shutdown Setting (Scalable)
- » Maximum Achievable Flow Rate Setting (Scalable)
- » Limit Shutdown Password Lockout

**The TCS 3000 Electronic Register automatically monitors corrected differential pressure and prevents deliveries when  $\Delta P$  exceeds scalable limits.**

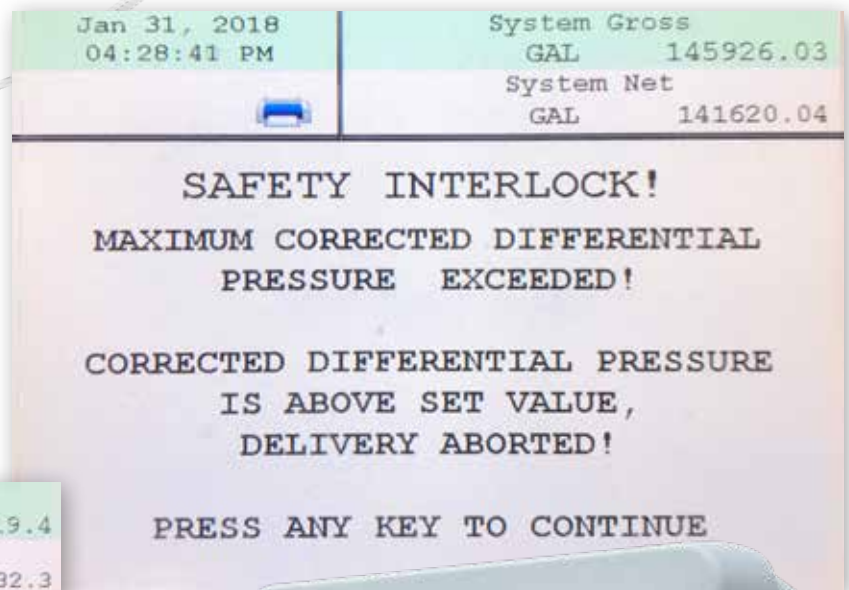

- CORR.DP PSI 8.4
- PEAK.CDP PSI 11.9
- PK. FLOW GAL/min 179.8



**“The TCS 3000 register’s ability to read and correct differential pressure allows us to stay on top of our filter maintenance while comfortably monitoring our equipment from the TCS HUB website.”**

**>>> Ron Pattie, SkyFuel Aviation Services**



©2023 Total Control Systems  
TCS DIFFPRESSR.004